

Product # _____ Type _____ Date _____
Project Name _____
Project Location _____ Prepared By _____

LYTESCAPER™ 1

Construction


- Housing and lens frame are constructed from heavy-duty low copper die-cast aluminum. Material is structurally rigid and uniformly dissipates heat for longer lumen maintenance life-hours. Standard finish is a mini texture charcoal gray using polyester powder coat paint. Other finishes are available upon request.
- Glass Lens is Minimum 1/8" thick thermal and impact resistant clear tempered glass. Lens frame and housing are sealed using an extruded, memory retentive gasket. All external hardware is stainless steel.
- Mounting Yoke is made from steel and finished with polyester powder coat to match luminaire.

Optical System

- Largest selection of optical choices shall be available to fit your applications. Please specify your selection from the ordering guide. Photometric Application Data table is provided as an additional tool for selecting an appropriate optic system suitable to the application.
- Glare Control: Choice of external glare control accessories are available. Please select them from the catalog ordering guide.


Product Applications

- | | |
|------------------------------|-----------------------------|
| ● Flood Lighting | ● Landscape Lighting |
| ● Very Narrow Flood Lighting | ● Sign Lighting |
| ● Stay Cable Bridge Lighting | ● Art Display Spot Lighting |
| ● Building Wall Washer | ● Flag Spot Lighting |

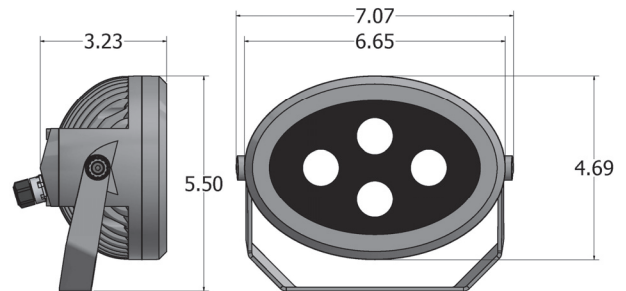

Fixture EPA: 0.4 sq. ft.
Weight: 3 lbs.

LED configuration shown for illustration purposes only.
Actual LED configuration may be different.

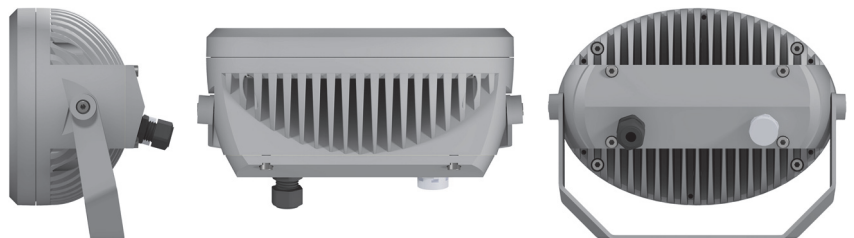

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.



835 Industrial Drive, Elmhurst, IL 60126 708.681.4330 www.nslights.com

Electrical Components

- **North Star AlphaLED™ Engine:** Designed and configured with Cree high power, high lumen, consistent CCT LEDs. AlphaLED™ modules enable North Star to deliver high quality standards and ensure warranty replacement. LED modules mounted directly on the highly conductive aluminum die-cast housing. These LEDs are operating below 85°C case temperature and deliver superior maintained illumination per LM80 L80 standards. Please refer to the LED Performance Data table for the targeted LED illumination life at 25°C to 40° C luminaire outside ambient temperature. The choice of color temperatures (3000K, 4000K and 5000K) are available to match your intended application.
- **LED Drivers:** UL/CSA recognized component to meet UL8750 & EN61347 (USR/CNR -E328335). Suitable for input power at 120-277VAC 50/60Hz. See Rated input power table for input voltage and current ratings.
- **Power connection:** A 6-foot long outdoor rated water and oil resistant cable shall be provided for electrical power and dimming data connections. Wiring is to be connected to the nearest junction box (By Others).

Mounting

- Adjustable aim and lock type yoke is provided with two 0.31 inch horizontal slots to mount on horizontal or vertical surface depending on application. The yoke is made of Steel and finished powder coat to match luminaire finish.

Dimming Controls

- Standard: Interface for 0 – 10V Dimming (Dim-to-Off)
- Optional: Interface for DMX or DALI protocol
DMX deep dimming to less than 1%

Refer to ordering guide for dimming selection

Safety Compliance


- UL 1598 and CSA C22.2 NO. 250.0 standards.
- Suitable for indoor/outdoor wet (IP66) or damp location use.
- 3G ANSI C136.31 vibration testing (suitable for use on bridges)
- IK07 impact resistant
- Operating Temperature Range: -40 C° to 40 C°

Warranty

- Limited 5 years
- LED: L80 60,500 hours at 40 C° ambient
- LED Driver: limited 5 years

Mounting Options

Yoke Mounting Dimensions

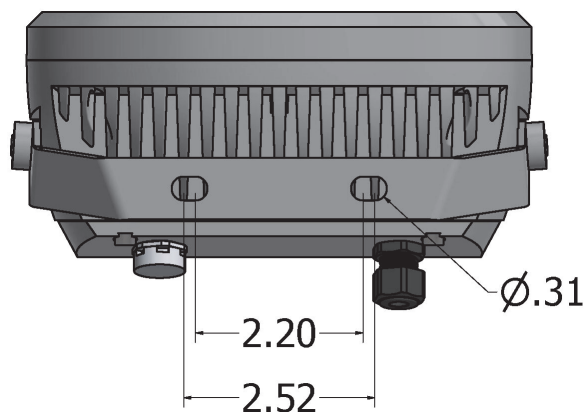


Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.



LYTESCAPER™ 1

Mounting Accessories


SB-2 MOUNTING BRACKET






FOR HORIZONTAL YOKE MOUNTING

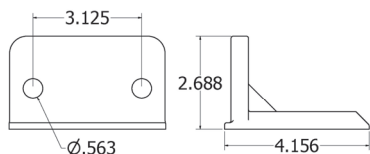


SB-3 PIPE CLAMP MOUNT




FOR PIPE SIZES OF 2 TO 3 INCHES




SB-5 POLE TOP SLIP-FITTER



FITS 2" TO 2-1/2" PIPE (2 3/8" TO 2 7/8" OD)





EASY WIRE PASS THROUGH - 3/4 -14 MPSP PIPE THREAD

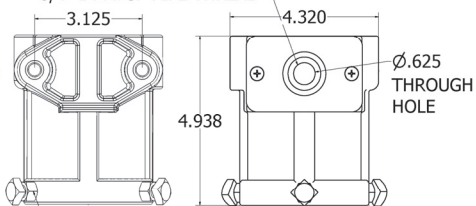

3/18-16 X 1-1/4" SQUARE HEAD BOLTS

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.

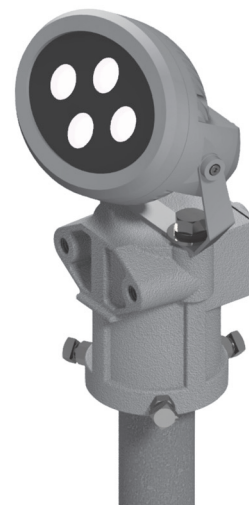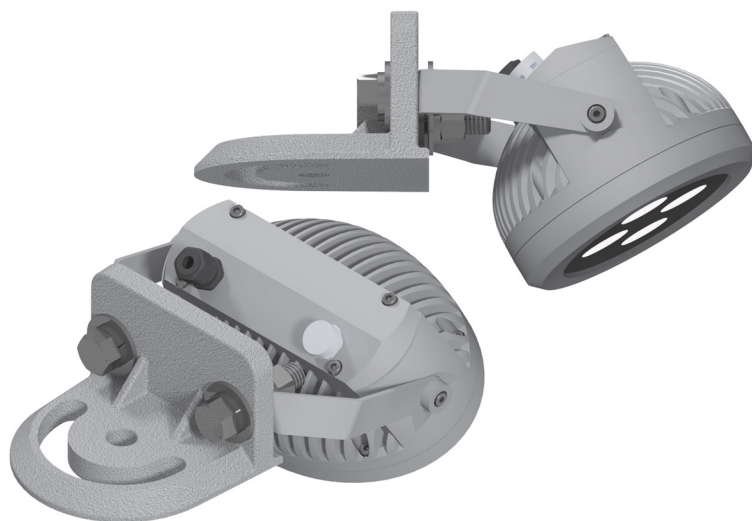


NORTH STAR
LIGHTING


835 Industrial Drive, Elmhurst, IL 60126 708.681.4330 www.nslights.com

LYTESCAPER™ 1

Glare Control Accessories

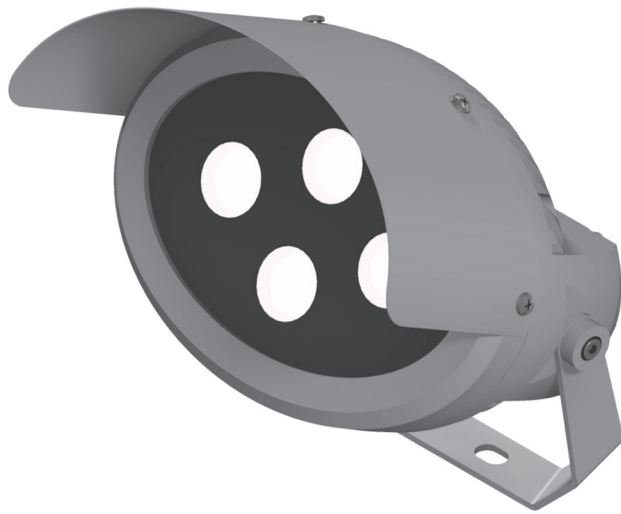

V – Visor

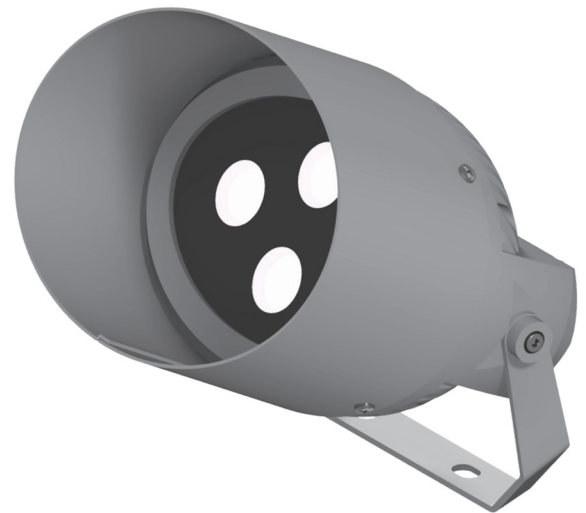

H – Hood



CL – Cross
Louver Hood

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.



NORTH STAR
LIGHTING

835 Industrial Drive, Elmhurst, IL 60126 708.681.4330 www.nslights.com

LYTESCAPER™ 1


Beam Information

Targeted LED Performance


LUMINAIRE DATA @ 85 DEGREE C. Tj

Cree LM80 Projected Life Hours per IESNA TM21.


BASIC MODEL NO	Number of LEDs	LED Color Temp.	LED Watts	Output Lumens	At 25-degree C, Luminaire Ambient		At 40-degree C, Luminaire Ambient	
					L90(8.5K) Life Hours	Ts-Degree C	L90(8.5K) Life Hours	Ts-Degree C
LSP-1	4	5000	17	1926	Greater than 51,400	Under 85	Greater than 51,400	Under 85
	4	4000		1834				
	4	3000		1742				
LSP-1	4	5000	8	1123	Greater than 51,400	Under 85	Greater than 51,400	Under 85
	4	4000		1070				
	4	3000		1016				




Narrow 10° – D10




Medium 23° – D23




Wide 45° – D45




Very-Wide 63° – D63



Elliptical Horizontal
38° x 12° – ELH



Elliptical vertical
12° x 38° – ELV



Asymmetric – ASY

NOTE: SEE PHOTOMETRIC APPLICATION DATA FOR SPECIFIC BEAM INFORMATION

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.



835 Industrial Drive, Elmhurst, IL 60126 708.681.4330 www.nslights.com

LYTESCAPER™ 1


Photometric Application Data

Performance Values	Optic D10	Optic D23	Optic D45	Optic D63	Optic ELH	Optic ELV
NEMA Classification	2HX2V	3HX3V	4HX4V	5HX5V	4HX2V	2HX4V
Maximum Center Candela Cd-max	40,763	9,804	2,857	1,548	8,827	8,827
Maximum Center Fc @10 ft - Fc10	408	98	29	15	88	88
Beam Angle @ 50% of Max. Fc - Ba degrees	10.2	23	45	63	38 x 12	12 x 38
Field Angle @ 10% of Max Fc - Fa degrees	19.6	39	69	96	61 x 26	26 x 61
Beam Diameter in feet @10 ft - Bd10	1.78	4.07	8.28	12.26	6.89 x 2.10	2.10 x 6.89
Field Diameter in feet @10 ft - Fd10	3.45	7.08	13.74	22.21	11.78 x 4.62	4.62 x 11.78

Photometric Conversion Table

This table is used to convert candela and footcandle values listed in the photometric files for this

MODEL NO	Number of LEDs	LED Color Temp.	LED Watts	Output Lumens	Conversion Multiplier - 4k to 3k or 5k for candela and foot candle values
LSP-1	4	5000	17	1926	1.050
	4	4000		1834	1.000
	4	3000		1742	0.950
LSP-1	4	5000	8	1123	0.613
	4	4000		1070	0.583
	4	3000		1016	0.554

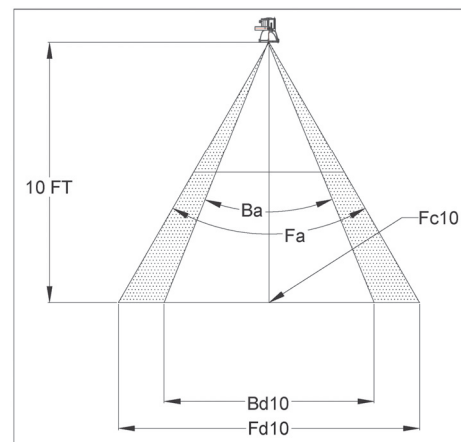

Distance Multipliers for Photometric Application Table (Adjusted from 10 ft values)

Distance in feet	Multiplier For Beam (Bd) or Field (Fd) Diameter	Multiplier For Footcandle (FC) values
10	1.00	1.0000
15	1.50	0.4444
20	2.00	0.2500
25	2.50	0.1600
50	5.00	0.0400
75	7.50	0.0178
100	10.00	0.0100
150	15.00	0.0044

Rated Input Power Table


LSP1 LED Power	Luminaire Rated input Power (AC 50/60 Hz)	Input Current at rated voltage			
Watts	Watts	120	208	240	277
17	20	0.16	0.09	0.08	0.07
8	9	0.08	0.04	0.04	0.03

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.




835 Industrial Drive, Elmhurst, IL 60126 708.681.4330 www.nslights.com

WIRING DIAGRAM - NON-DIMMING

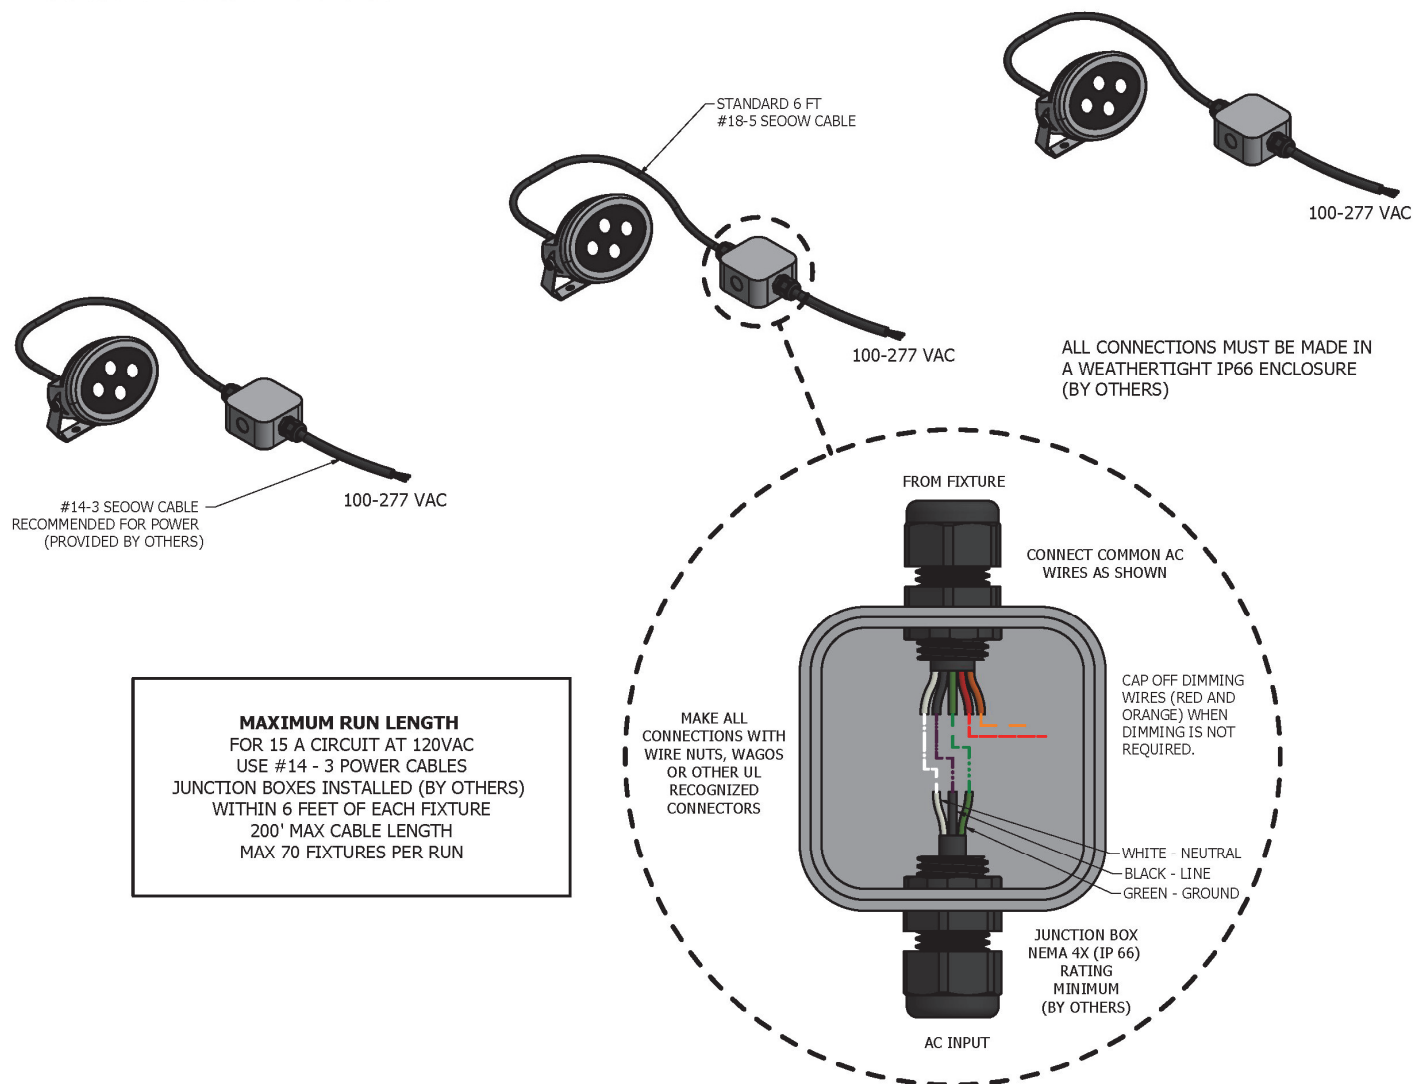

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.

WIRING DIAGRAM - DIMMING (0-10 VDC)

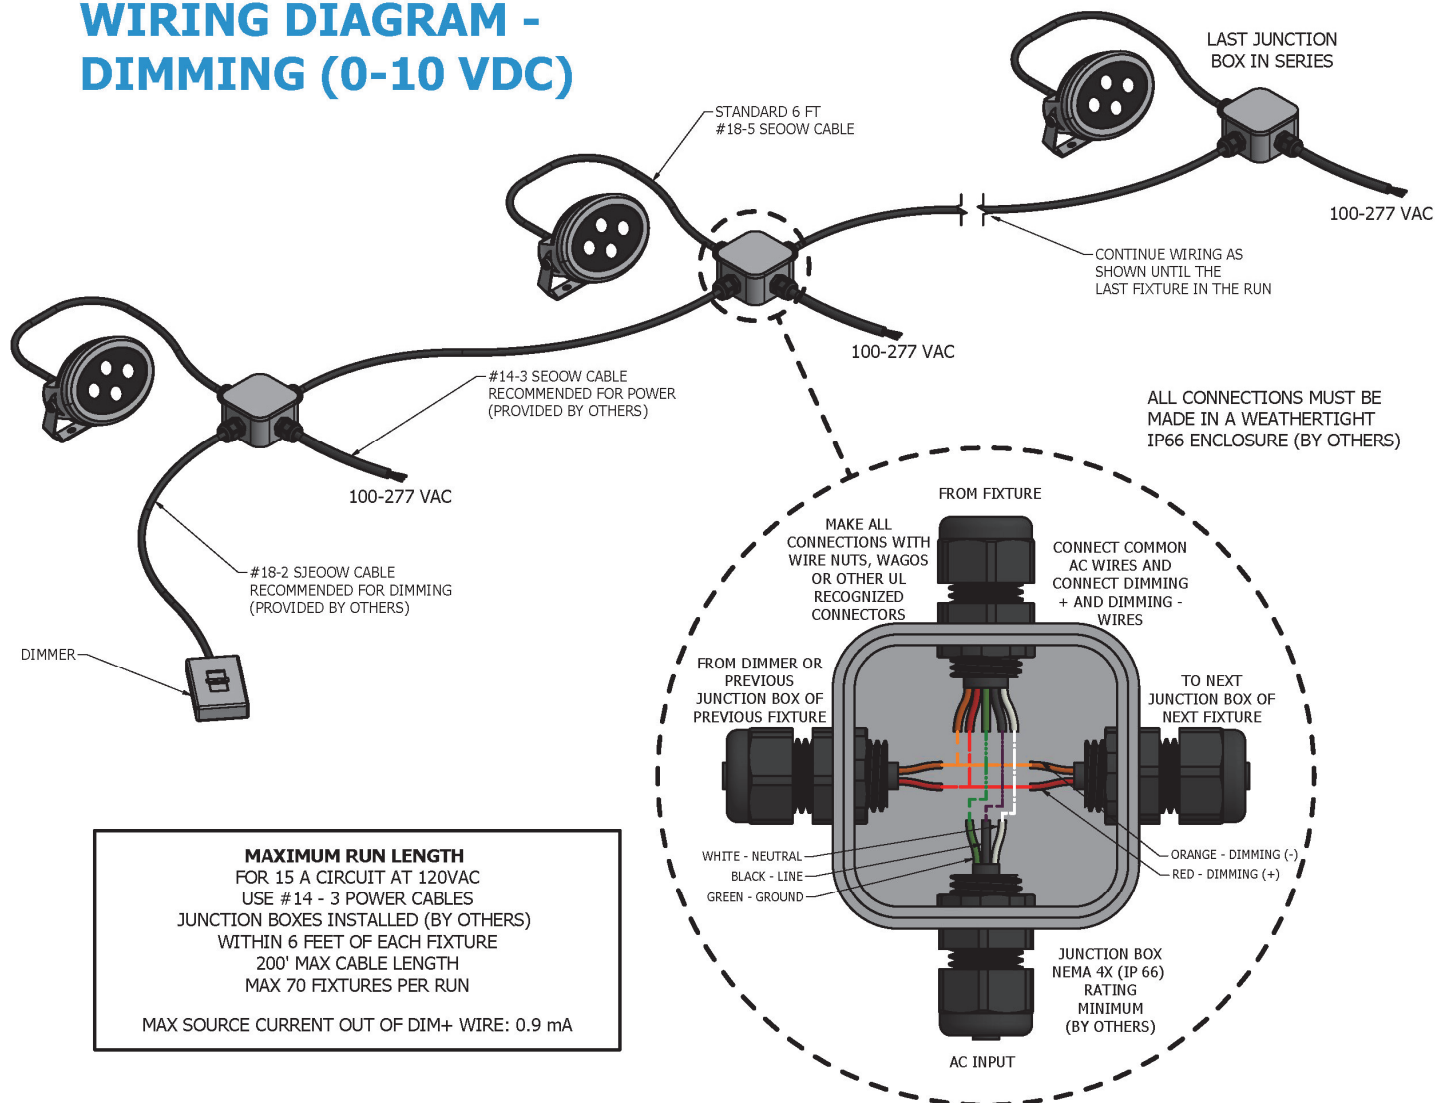

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.

LYTESCAPER™ 1

Ordering Guide

	-		-		-		-	
--	---	--	---	--	---	--	---	--

Model Number	LED Power (Watts)	CCT Color Temperature	Light Beam Distribution (FWHM)	Input voltage (VAC)	Lighting Controls	Glare Control
LSP1	17 W	3K - 3000 K	D10 - 10° Narrow Beam	U - 120V-277V	ND - Non-Dimming	V - Visor
	8 W	4K - 4000 K	D23 - 23° Medium Beam	V1 - 347V	DM1 - 1-10 VDC Dimming Interface Only	H - Hood
		5k - 5000 K	D45 - 45° Wide Beam	V2 - 480V	DM2 - 0-10 VDC (Dim to Off) Interface Only	CL - Cross Louver
		XK - Specify CCT or single Color*	D63 - 63° Beam		DMX - DMX Dimming Interface Only**	
			ELH - 38° x 12° Elliptical Horizontal Beam		DXD - DMX Deep Dimming - Less than 1%**	
			ELV - 12° x 38° Elliptical Vertical Beam			
			ASY - Asymmetric Beam			

*Requires minimum 50 quantity and will have a minimum 10-week lead-time.

**Contact North Star Lighting for Availability and lead-times.

Due to continuing efforts to improve our products, North Star Lighting reserves the right to make changes to this product at any time without prior notice.



835 Industrial Drive, Elmhurst, IL 60126 708.681.4330 www.nslights.com